



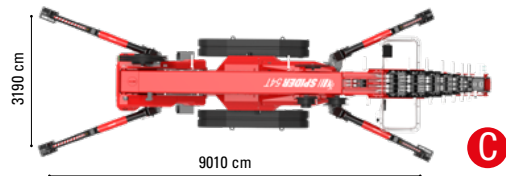

# Technical Specifications

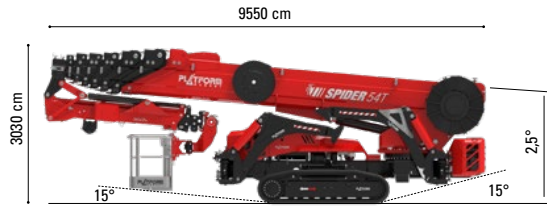

## TANK CAPACITY

Hydraulic oil tank	210 L
Fuel tank	100 L

## MACHINE WEIGHTS

Weight (basic version)	23000 kg
Ground pressure on stabilisers	167 kN

## MOTOR

Net input power	53 kW
Technical data	12 V

## HOISTING WINCH

Direct Pull	1000 kg
Quantity of Rope	56 m
Max. Hoisting speed	20 m/min
Rope Diameter	8 mm

Compliant with:  
 - UNI EN 13000 Cranes - Mobile Cranes;  
 - ISO 4301-1/2 Cranes

(All specs E&OE and subject to change)

<b>Max working height</b>	<b>54.1 m</b>
Max platform height	52.2 m
<b>Max horizontal outreach with load basket 136 kg</b>	<b>21 m</b>
Max rated capacity	400 kg
Turret rotation	360°
Basket rotation	±180°
Max slope	20°
Max side slope with narrow/wide carriage	12 / 15 m
Max travel speed	2.2 km/hr
Norminal track dimensions	450 x 78 x 81 cm
Max permissible wind speed	12.5 m/sec
Max permissible manual stress	400 N

## DIMENSIONS

Max permissible inclination on outriggers for AWP working consent	±1°
Machine length folded with basket	9.55 m
Machine length folded without basket	9.55 m
Machine width folded with basket	2.43 m
Machine width folded without basket, tracks retracted	1.75 m
Machine height folded with retracted carriage	2.45 m
Undercarriage height (with undercarriage extended)	0.42 m
Aluminium basket size	2.3 x 0.91 m

