

43m Spider Lift



With a massive 43 meters of working height, and up to 17 meters of horizontal outreach, the new 43T Spider Lift is truly a formidable weapon.

Combined with a huge basket capacity of 330kg, this machine has the ability to tackle the biggest jobs where size really does matter!

Enormous stabilizer leg travel allows the 43T to set up and operate in the most challenging terrain. And its powerful track drive will ensure it gets to the location with ease.

And yet, with its unique double telescopic articulated booms, this machine will also allow operators to maneuver the basket into the work zone with fine precision.




Far left: The 43T has a huge basket capacity of 330kg. The enormous stabilizer legs allow operation nearly anywhere.


Above middle: Compact package making transport much simpler and more economical compared to conventional boom-lifts of similar height.

Above: With 43 meters of working height and 17 meters of horizontal reach the 43T will get the job done.

PB43T

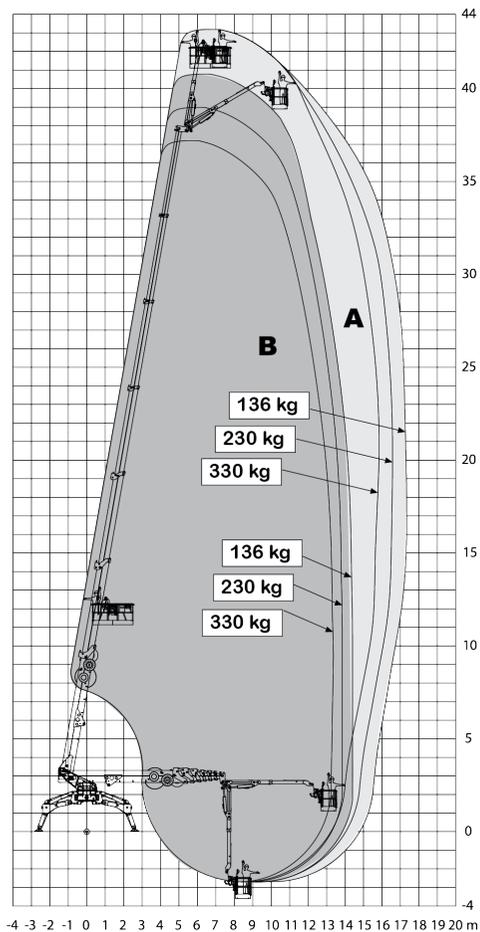

B = Narrow footprint - Stabil. stretta
A = Wide footprint - Stabil. larga

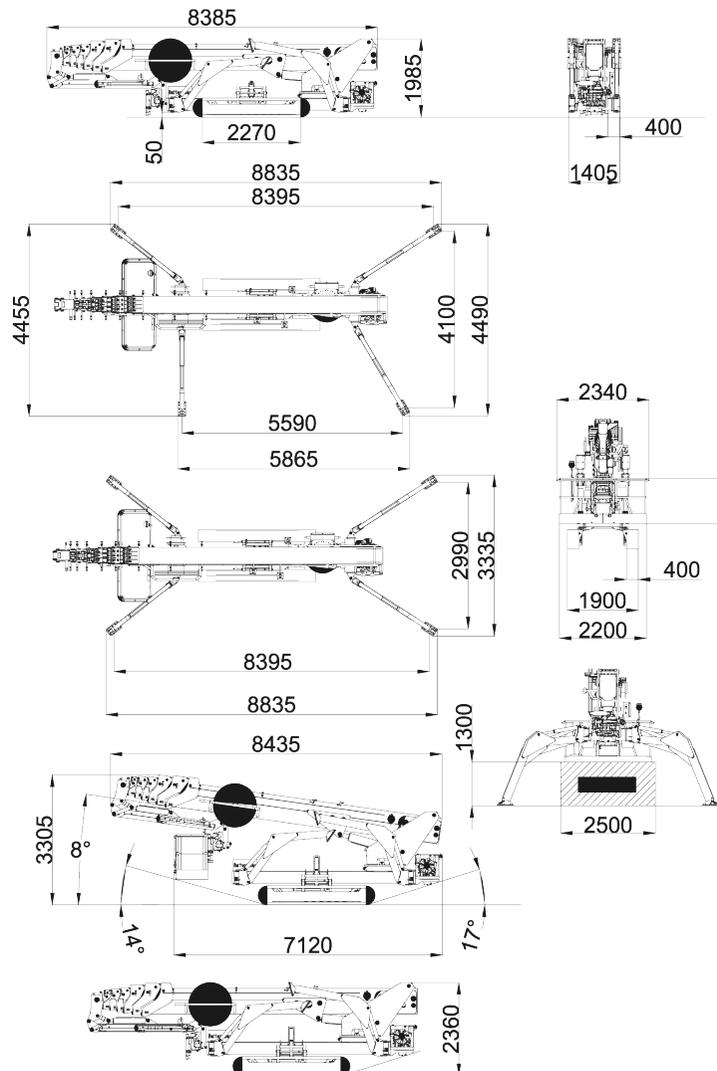

Max working height	43.18 m
Max working height in narrow set	43.18 m
Max horizontal outreach	17.33 m
Max SWL	330
Basket rotation	Yes
: Engine + Batteries	12 800 kg
Ground pressure driving (approx)	
Max stabiliser force	94 kN
Max stabiliser pressure (with std foot pad)	
Traffic load (live load) travelling	6.5 kN / m ²
Traffic load (live load) stabilised wide set	4.3 kN / m ²
Traffic load (live load) stabilised narrow set	
Auto levelling	Yes
Max slope for stabilisers with no extra pads	
Gradeability lengthwise	15°
Gradeability sideways	17°
Standard power source	Kubota D1803, 37 hp
Optional power source	N/A
Dual power options	200Ah 48V Lithium Batteries
Expanding tracks	Yes
Drive Speed	
Radio control	Yes
Engine battery	12V
Electric emergency lowering	Yes

(All specs E&OE and subject to change)

